DOCKS
MARINAS
WALKWAYS
GANGWAYS
YOU NAME IT, WE'LL COVER IT.

SURE·STEP™
DOCK & DECKING

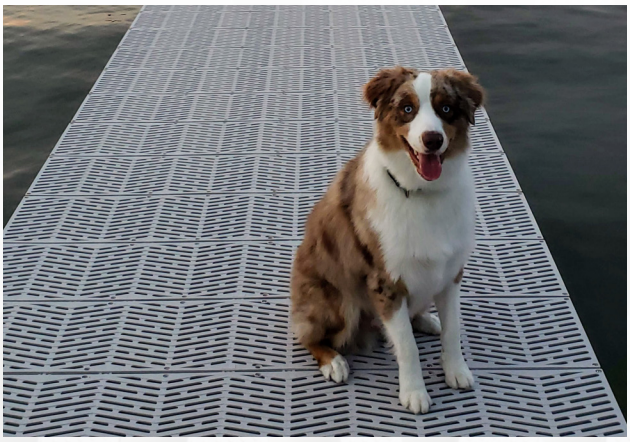

PLUS SERIES

- Available in 2ft, 3ft, 4ft, 5ft, and 6ft
- High impact material exceeds competition
- **ADA compliant** with a non-slip surface
- Light penetration surface is the best choice for marine and other environmentally sensitive areas
- Withstands storm surges
- Minimizes wave and wind forces

Our products are:

- Barefoot friendly
- Have surfaces that remain cool
- Environmentally conscious
- Durable and long lasting

Perspective Products' manufacturing expertise dates back to 1989. We continue to manufacture high-quality, long- lasting, durable products with ISO 9001:2015 standards.

Our proven test results—along with a warranty that exceeds most competitors'—will give you the assurance you need.

While we've made every attempt to illustrate color options, photos are not an exact color match. Please feel free to contact us if you are in need of a color sample.

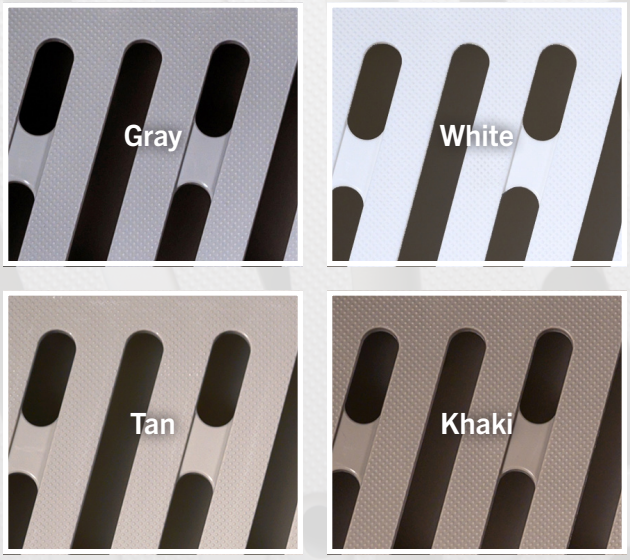

LIFETIME LIMITED WARRANTY

DOCK & DECK SUPPLY
Everything for building & living your outdoor life

MADE IN USA

7300 Roscoe Road | 251-525-0422
www.dockanddecksupply.com

SPECIFICATIONS AND MEASUREMENTS

SURE·STEP™ DOCK & DECKING

Base material	100% virgin polypropylene				
Thickness	1.2" For all sizes				
Sizes*	2'x1'	3'x1'	4'x1'	5'x1'	6'x1'
Weights	2'-3LBS	3'-4.5LBS	4'-6.0LBS	5'-7.5LBS	6'-9LBS
Light Availability					
At 18" Height	53%				
At 60" height	82%				
High UV stabilizer additives					

*Changes in temperature may cause minor expansion/contraction

2'

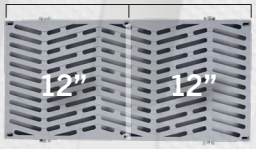

Spans for each size are shown on the panel.

3'

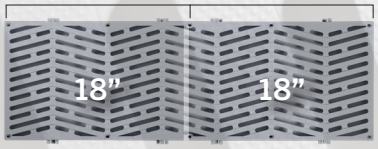

4'

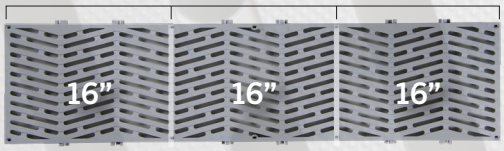

5'

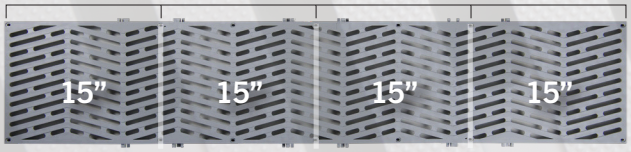

6'

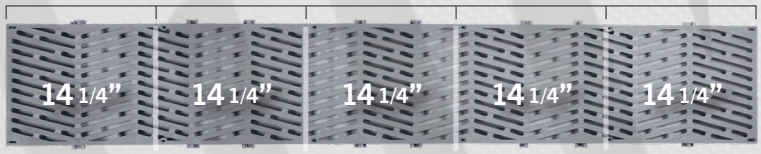

OUTSIDE TESTING RESULTS EXCEEDING INDUSTRY STANDARDS.

- ☑ **Creep Recovery:** Constant load on the product and how much the deflection is over time. Once the load is taken off, how much it comes back to its original shape. How much it recovers from being deflection.
- ☑ **Light availability:** The amount of light allowed.
- ☑ **Flexural properties:** Determining the flexural strength of the product at varying temperatures.
- ☑ **IZOD impact:** Evaluating the impact strength of the actual material—the resistance to impact forces. Cold set—what the cold temperatures do to the product.
- ☑ **Coefficient of Friction:** The pressure between two surfaces and the force to move one surface horizontally over another.
- ☑ **Coefficient of Linear Thermal Expansion:** How much an object expands with temperature.
- ☑ **Load Capacity:** Applying a point load to the product to determine the maximum point load for the product. Concentrated load at midspan between the two joists.

DOCK & DECK SUPPLY

MADE IN USA

PROUDLY MANUFACTURED BY:

PERSPECTIVE™ PRODUCTS DOCK & DECKING

7300 Roscoe Road | 251-525-0422
www.dockanddecksupply.com